


Tubos PVC para Canalizaciones Eléctricas NTP 399.006

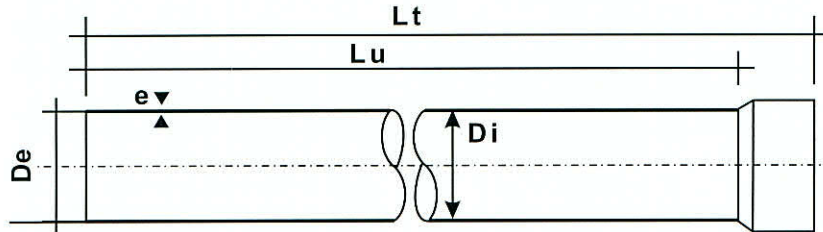

| DIAMETRO NOMINAL Dn (pulg) | DIAMETRO EXTERIOR De (mm) | DIAMETRO INTERNO Di (mm) | ESPESOR MINIMO e (mm) | LONGITUD TOTAL Lt (m) | LONGITUD UTIL Lu (m) | PESO MINIMO (kg) |
|----------------------------------|---------------------------------|--------------------------------|-----------------------------|-----------------------------|----------------------------|---------------------|
|----------------------------------|---------------------------------|--------------------------------|-----------------------------|-----------------------------|----------------------------|---------------------|

Clase Pesada *(P)

| | | | | | | |
|-------|-------|-------|-----|---|------|-------|
| 1/2 | 21,0 | 17,4 | 1,8 | 3 | 2,97 | 0,456 |
| 3/4 | 26,5 | 22,9 | 1,8 | 3 | 2,97 | 0,587 |
| 1 | 33,0 | 29,4 | 1,8 | 3 | 2,96 | 0,741 |
| 1 1/4 | 42,0 | 38,0 | 2,0 | 3 | 2,95 | 1,056 |
| 1 1/2 | 48,0 | 43,4 | 2,3 | 3 | 2,95 | 1,387 |
| 2 | 60,0 | 54,4 | 2,8 | 3 | 2,94 | 2,113 |
| 2 1/2 | 73,0 | 66,0 | 3,5 | 3 | 2,93 | 3,210 |
| 3 | 88,5 | 80,9 | 3,8 | 3 | 2,91 | 4,247 |
| 4 | 114,0 | 106,0 | 4,0 | 3 | 2,91 | 5,806 |

Clase Liviana *(L)

| | | | | | | |
|-------|------|------|-----|---|------|-------|
| 5/8 | 15,9 | 13,7 | 1,1 | 3 | 2,98 | 0,215 |
| 3/4 | 19,1 | 16,7 | 1,2 | 3 | 2,97 | 0,283 |
| 1 | 25,4 | 22,8 | 1,3 | 3 | 2,97 | 0,413 |
| 1 1/4 | 31,8 | 29,2 | 1,3 | 3 | 2,96 | 0,523 |
| 1 1/2 | 38,1 | 34,9 | 1,6 | 3 | 2,96 | 0,771 |
| 2 | 50,8 | 47,4 | 1,7 | 3 | 2,95 | 1,101 |

NORMA DE FABRICACIÓN

NTP 399.006

Gama de Diámetros :

L: De 5/8" a 2"

P: De 1/2" a 4"

*Antes P: SAP y L: SEL


Clases : Liviana (L) y Pesada (P)

Sistema de Empalme : Espiga - Campana

Accesorios: Curva x 90°

Conector a caja

Unión Simple

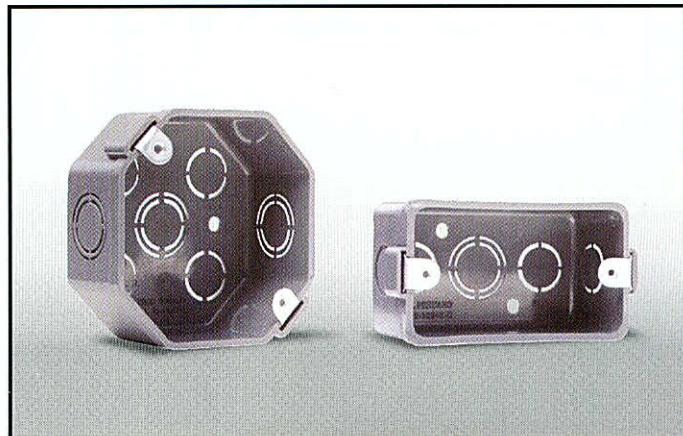

CAJAS RECTANGULAR Y OCTOGONAL